




MVP 160-3 , 隔膜泵 , 230 V , 50/60 Hz

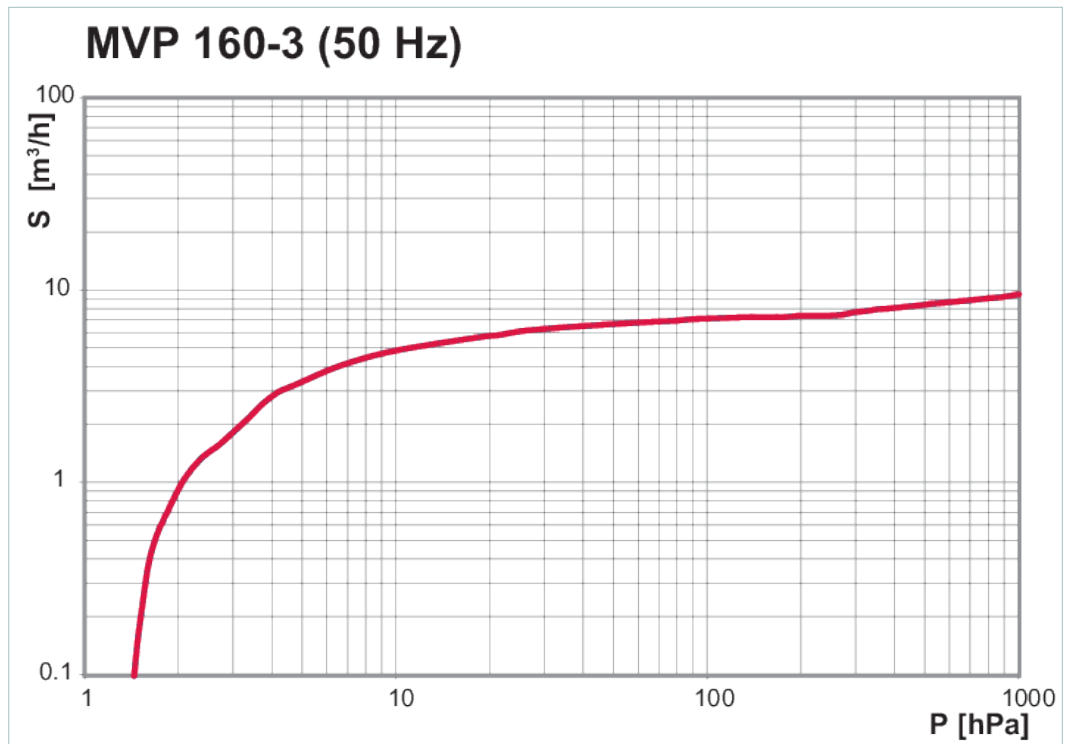

### MVP 160-3, 隔膜泵, 230 V, 50/60 Hz

- 具有 200 l/min 抽吸能力的高性能隔膜泵
- 适用于电源电压：230 V ( $\pm 10\%$ ), 50/60 Hz
- 适用于在其中需要干燥、无油真空的应用

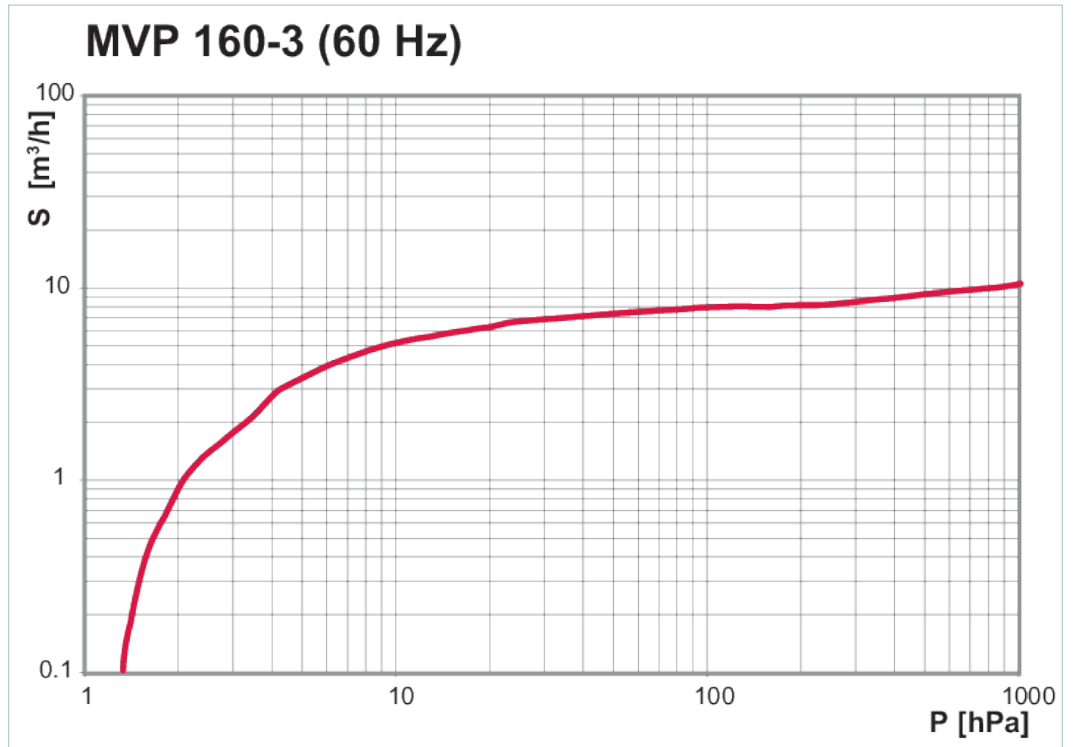

技术参数	MVP 160-3, 隔膜泵, 230 V, 50/60 Hz
50 Hz 时的抽速	9.6 m <sup>3</sup> /h
50 Hz 时的转速	1,500 rpm   1,500 min <sup>-1</sup>
60 Hz 时的抽速	10.4 m <sup>3</sup> /h
60 Hz 时的转速	1,800 rpm   1,800 min <sup>-1</sup>
不带气镇的声压级	52 (A)
不带气镇的最终压力	≤ 2
保护类型	IP20
冷却类型, 标准	
开关	
最大吸入压力	1100
最大排气压力	1100
最高工作海拔	2000
泄漏率	≤ 2 · 10 <sup>-3</sup> Pa m <sup>3</sup> /s
泵的级数	8
温度: 储存	-10 – 60 °C
环境温度	10 – 40 °C
电机型号	
电源连接: 电压	230
电源连接: 电压(范围)	±10 %
连接法兰 (入口)	DN 25 ISO-KF
连接法兰 (出口)	G 1/4" +
重量	25

订单号	
MVP 160-3	PK T01 400

## **VACUUM SOLUTIONS FROM A SINGLE SOURCE**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

## **COMPLETE RANGE OF PRODUCTS**

From a single component to complex systems:

We are the only supplier of vacuum technology that provides a complete product portfolio.

## **COMPETENCE IN THEORY AND PRACTICE**

Benefit from our know-how and our portfolio of training opportunities!

We support you with your plant layout and provide first-class on-site service worldwide.

Are you looking for a  
perfect vacuum solution?  
Please contact us:

**Pfeiffer Vacuum GmbH**  
Headquarters · Germany  
T +49 6441 802-0  
info@pfeiffer-vacuum.de

[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

All data subject to change without prior notice.

**PFEIFFER**  **VACUUM**